


Name _____

MULTIPLE CHOICE. Choose the one alternative that best completes the statement or answers the question.

- 1) Technician A says that worn flywheels should always be replaced. Technician B says that some worn flywheels can be resurfaced. Which technician is correct? 1) _____
- A) Technician A only
 - B) Technician B only
 - C) Both technicians
 - D) Neither technician

- 2) Where is the clutch pedal free play adjustment made? 2) _____

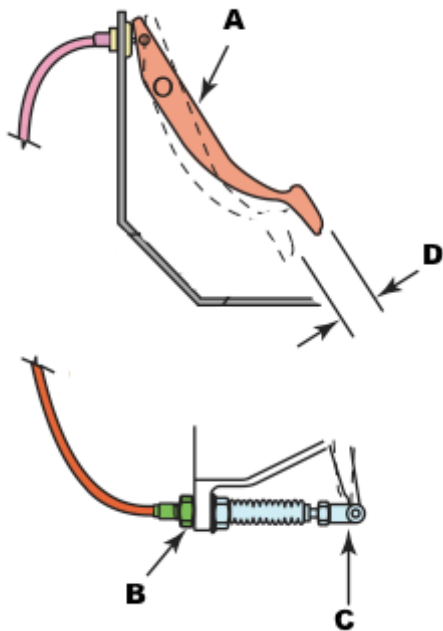

- A) A
- B) B
- C) C
- D) D

- 3) Technician A replaces the clutch release bearing as part of any routine clutch service. Technician B says that bellhousing bore misalignment may be corrected by using offset dowels. Which technician is correct? 3) _____
- A) Technician A only
 - B) Technician B only
 - C) Both technicians
 - D) Neither technician

- 4) When measuring crankshaft end play, a maximum of _____ is allowed. 4) _____
A) 0.0005 inch
B) 0.25 mm
C) 0.002 inch
D) 0.05 mm
- 5) A squeal is heard as the clutch pedal is depressed about one inch. This is probably caused by a _____ 5) _____
A) Defective or worn release (throwout) bearing
B) Worn clutch disc
C) Weak pressure plate
D) Worn pilot bearing
- 6) A clutch disc has measured 0.020 rivet head depth. According to the text what should the technician do? 6) _____
A) Resurface the clutch disc
B) Replace the clutch disc
C) Sand the disc with 80 grit sandpaper
D) Replace the flywheel
- 7) Clutch chatter can be caused by _____. 7) _____
A) Grease or oil on the clutch facing
B) Broken engine mounts
C) Low hydraulic fluid level
D) Too little free play in the clutch pedal
- 8) A transmission is hard to shift into first gear and cannot be shifted into reverse at all. What could be the cause? 8) _____
A) A loose clutch pedal pad
B) Excessive clutch pedal free-play
C) Not enough clutch pedal free-play
D) Bad U-joints
- 9) A cable-operated clutch is being adjusted. Technician A says that free travel is measured at the clutch pedal and should be between 3/4 and 1 inch (19 to 25 mm). Technician B says that the clutch spin-down time should be less than two seconds. Which technician is correct? 9) _____
A) Technician A only
B) Technician B only
C) Both technicians
D) Neither technician
- 10) A clutch disc is being installed. Technician A says that the damper assembly of the clutch disc normally faces the pressure plate. Technician B says that the disc splines should be lightly lubricated. Which technician is correct? 10) _____
A) Technician A only
B) Technician B only
C) Both technicians
D) Neither technician

Answer Key

Testname: MDA8_5A

1) B

Page Ref: 90

2) B

Page Ref: 87

3) C

Page Ref: 93-94

4) B

Page Ref: 91

5) A

Page Ref: 89

6) B

Page Ref: 91

7) A

Page Ref: 90, 94

8) B

Page Ref: 86, 88

9) A

Page Ref: 86, 88

10) C

Page Ref: 94