


Accessory Circuits

Chapter 19

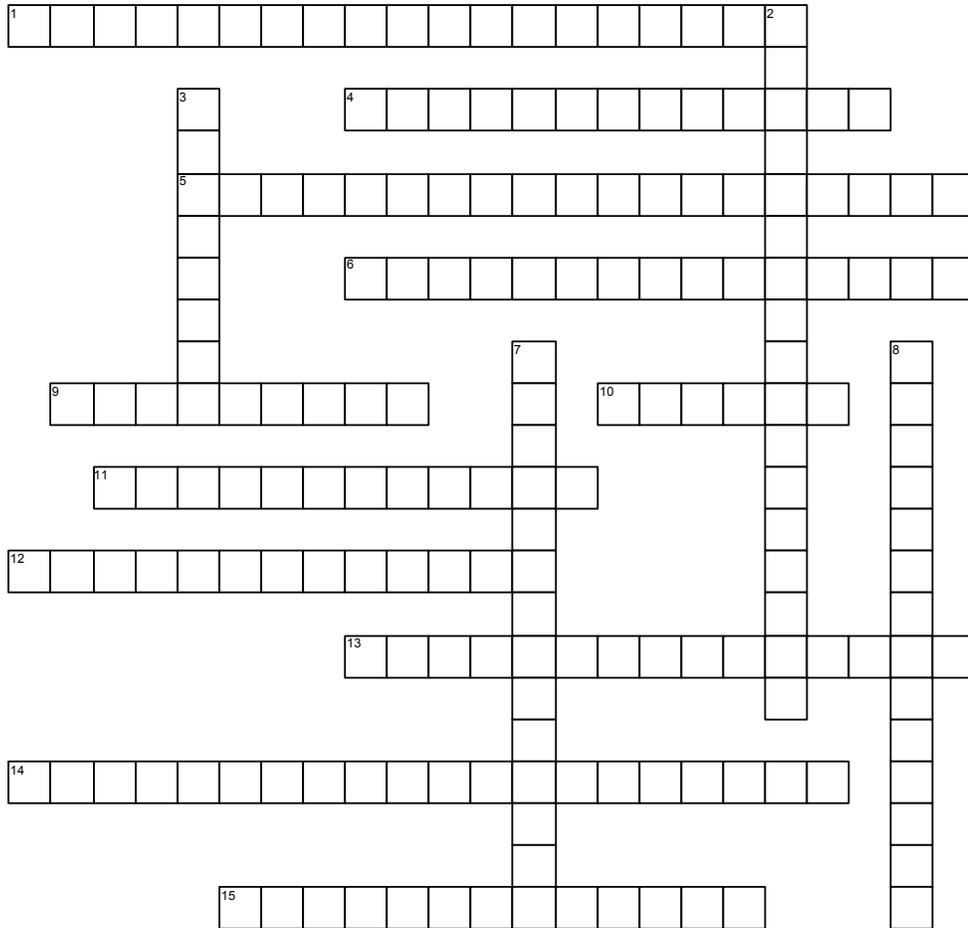

<http://jameshaldeman.com>

ACROSS

- 1 Additional _____ located at each individual power window will operate them as well.
- 4 _____ is a combination of electrical and mechanical components designed to maintain a constant, set vehicle speed without driver pressure on the accelerator pedal.
- 5 The driver uses the _____ to operate the power windows at all locations in the vehicle.
- 6 Most power window systems use _____ electric motors.
- 9 The rear window is also called a _____.
- 10 Some power seats use a small air pump to inflate a bag in the lower part of the back of the seat, called the _____.
- 11 For older systems, if one of the _____ that run from the independent switch to the master switch is cut, the power window may operate in only one direction.
- 12 The thermoelectric device uses the _____.
- 13 The power window motors rotate a mechanism called a _____.

- 14 Most electrically heated and cooled seats use a _____ located under the seat cushion and seat back.
- 15 Some power window systems use a _____ located on the driver's controls to prevent operation of the power windows from the independent switches.

DOWN

- 2 A _____ is often called a gear nut.
- 3 _____ is a device installed in many new vehicles that duplicates the radio-frequency code of the original garage door opener.
- 7 If one of the _____ that run from the independent switch to the motor is cut, the window will not operate in either direction.
- 8 A _____, usually located between the electric motor and the transmission, and prevents electric motor damage in the event of a jammed seat.