

# Engine Coolant Temperature (ECT) Graph

**Meets NATEF Task:** (A8-B-7) P-2 Inspect and test sensors, actuators, and circuits using a graphing multimeter (GMM)/digital storage oscilloscope (DSO); perform necessary action.


Name \_\_\_\_\_ Date \_\_\_\_\_ Time on Task \_\_\_\_\_

Make/Model/Year \_\_\_\_\_ VIN \_\_\_\_\_ Evaluation: 4 3 2 1

Most engine coolant temperature sensors (ECTs) use a negative temperature coefficient (NCT) thermistor. The resistance of the sensor decreases as the temperature of the engine coolant increases. The vehicle computer applies a voltage to the sensor. The purpose of this worksheet is to plot the relationship of the ECT sensor temperature and the voltage.

- \_\_\_\_\_ 1. Carefully back probe the signal wire of the engine coolant temperature (ECT) sensor.
- \_\_\_\_\_ 2. Set the digital multimeter to read DC volts.
- \_\_\_\_\_ 3. Connect a scan tool or use a pyrometer to measure engine coolant temperature.
- \_\_\_\_\_ 4. Plot the voltage of the ECT every 10° as the engine warms up.

**NOTE:** Many engine computers connect another resistor in the ECT circuit when the temperature of the coolant reaches 120°-140°. This causes the voltage at the ECT sensor to rise, then continue to fall as the coolant temperature continues to rise.

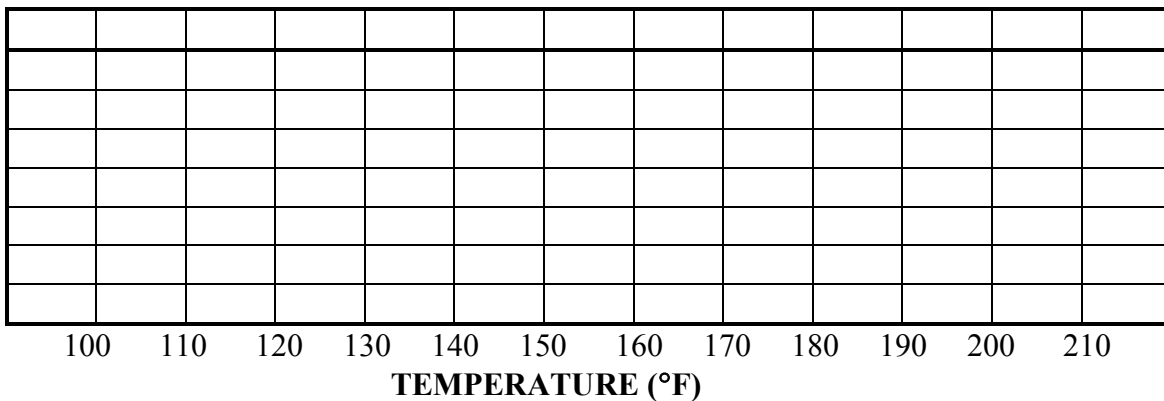

- \_\_\_\_\_ 5. Was there a upward movement of the graph when the thermostat opened?  
     **YES** \_\_\_\_   **NO** \_\_\_\_
- \_\_\_\_\_ 6. Was there a slight movement upward when the cooling fan came on?  
     **YES** \_\_\_\_   **NO** \_\_\_\_
- \_\_\_\_\_ 7. Based on the test results, what is the necessary action? \_\_\_\_\_