


Global OBD II and Mode \$06

Chapter 11

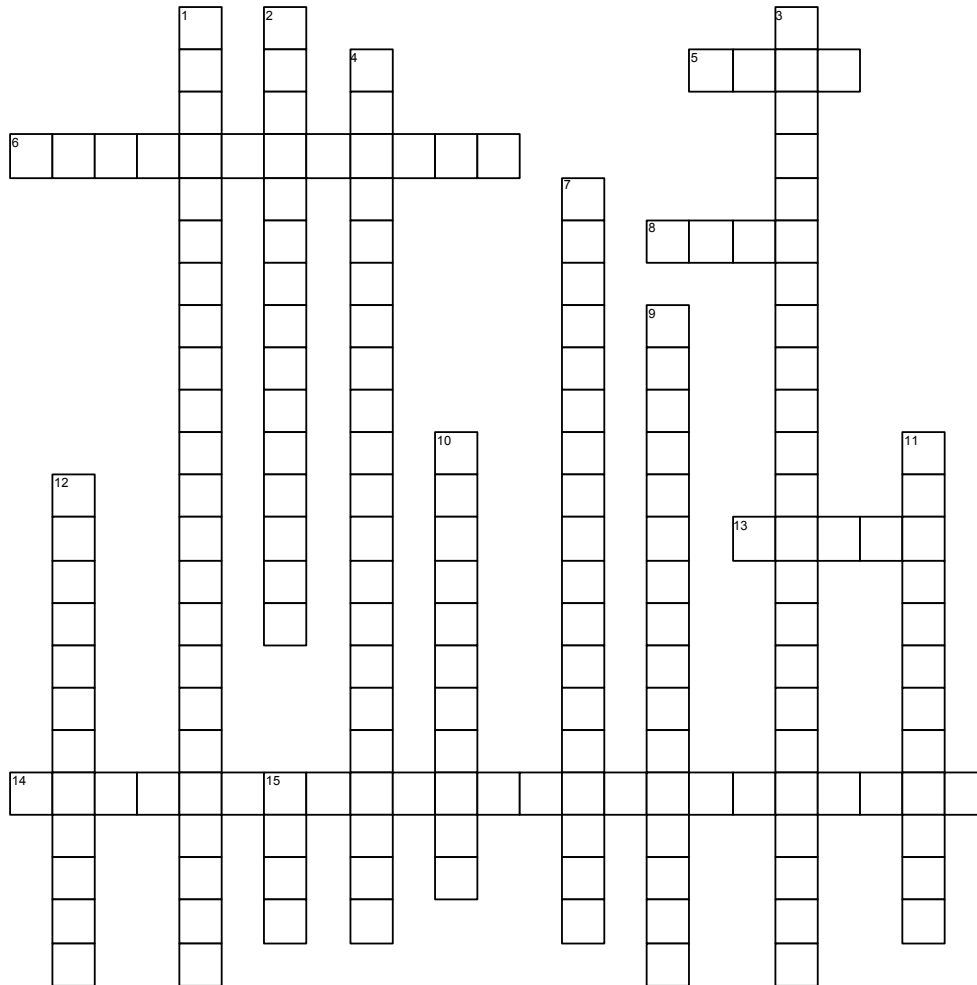

<http://jameshaldeman.com>

ACROSS

- 5 One of the _____ system tests that can be monitored using a scan tool and mode \$06 data is the engine off, natural vacuum test.
- 6 One of the _____ tests performed on a GM vehicle equipped with CAN is the rich-to-lean sensor switch time.
- 8 _____ \$06 is used by service technicians to monitor the PCM test results of various systems.
- 13 The test data displayed often includes upper limit and/or lower limit, test results, and _____.
- 14 Hexadecimal coding is used for _____.

DOWN

- 1 Global OBD II can check the _____ to determine what it has detected about a failure.
- 2 Global OBD II is used by inspectors where _____ is performed.
- 3 Mode one is used for _____ display.
- 4 CAN-equipped vehicles use _____.
- 7 _____ is used by both Hexadecimal coding and CAN-equipped vehicles.
- 9 For individual _____, check test ID \$53.
- 10 _____ is the standardized format of on-board diagnostics, following SAE standard J1962.
- 11 Type B _____ are set if the misfire exceeds 2% to 4%, depending on the engine, make, model, and year.
- 12 _____ is another name for Global OBD II.
- 15 _____ is similar to the U.S. version and meets the standard specified for generic OBD data.