


Automatic Transmission/Transaxle Diagnosis And In-Vehicle Service

Chapter 129

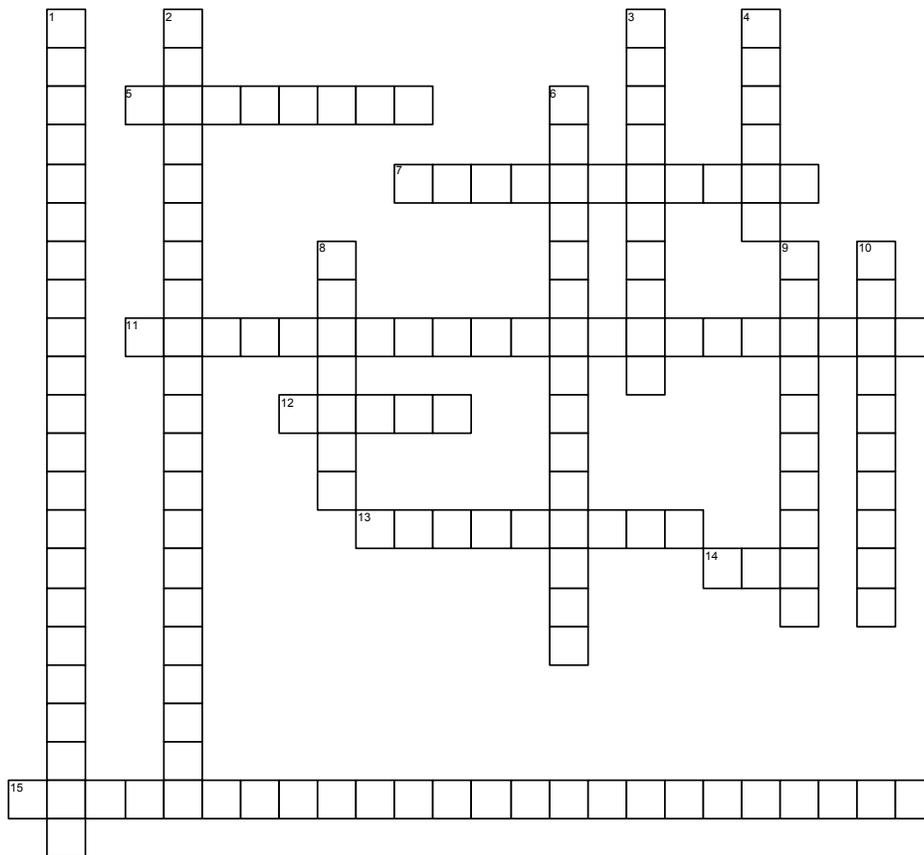

<http://jameshaldeman.com>

ACROSS

- 5 A typically automatic transmission _____ may use a clip to keep it from being forced upward due to pressure changes inside.
- 7 All vehicle manufacturers publish _____ that indicate which holding device is used for each gear selection.
- 11 A P0736 DTC indicates _____.
- 12 If the fluid is _____, this usually means that coolant has entered the fluid.
- 13 A _____ is often performed to verify the proper operation of the torque converter.
- 14 Using a _____ designed for ATF and a black light is an effective method to locate ATF leaks.
- 15 According to studies performed by automobile manufacturers, as many as 30% of the vehicles can be repaired following the information, suggestions, or instructions concerning replacement parts found in a _____.

DOWN

- 1 If there are any _____ stored in the memory of the vehicle computer, then a problem has been detected that should be corrected before further testing.
- 2 A P0752 DTC indicates _____.
- 3 If the color of the fluid is dark brown or black, then the fluid has been _____.
- 4 If transmission fluid feels _____ when rubbed between your fingers, then it is contaminated with friction material or other solid particles.
- 6 _____ involves connecting a pressure gauge to pressure taps located on the outside of the automatic transmission/transaxle.
- 8 Engine _____ symptoms can often be blamed as a transmission problem.
- 9 A _____-equipped vehicle will usually provide an actual pressure reading on a scan tool.
- 10 Use all _____ when diagnosing automatic transmission/transaxle concerns to help pinpoint the area where the fault is located.