


Valve And Seat Service

Chapter 31

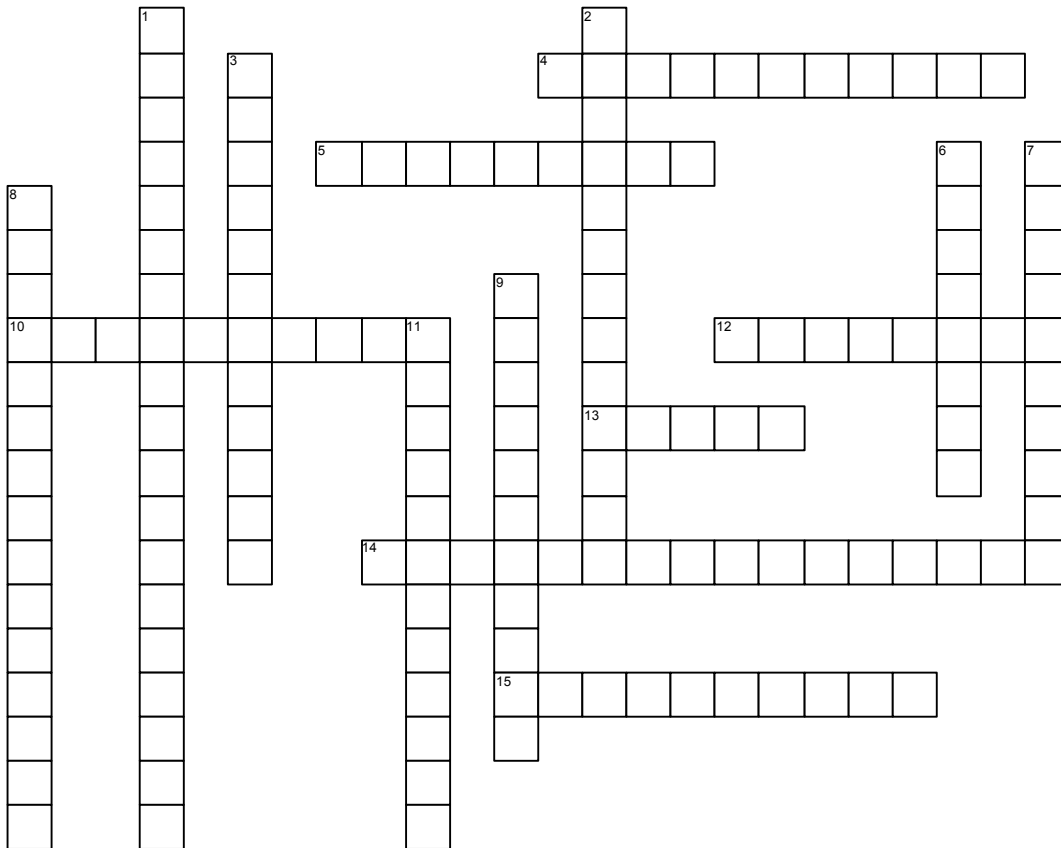

<http://jameshaldeman.com>

ACROSS

- 4 A _____ holds the valve against the seat.
- 5 The portion of the valve that seals against the _____ in the cylinder head is called the valve face.
- 10 An _____ fits into a machined recess in the steel or aluminum cylinder head.
- 12 An alloy of nickel, chromium, and tungsten, _____ is nonmagnetic.
- 13 Another name for valve keepers are _____.
- 14 _____ is the tendency of a valve spring to vibrate.
- 15 _____ occurs when the valve continues to stay open after the camshaft lobe has moved from under the lifter.

DOWN

- 1 _____ have uneven spacing between the coils.
- 2 _____ locate themselves in the least worn section of the guide.
- 3 _____ simply take the pressure off the valve to allow engine vibration to rotate the valve.
- 6 The valve keepers secure the spring _____ to the stem of the valve.
- 7 The valve is held in place and is positioned in the head by the _____.
- 8 One type of _____ uses small steel balls and slight ramps.
- 9 Automotive engine valves are of a _____ design. □
- 11 Rapid increase in temperature will give a _____ to the valve.