


Transmission/Transaxle Removal and Disassembly

Chapter 15

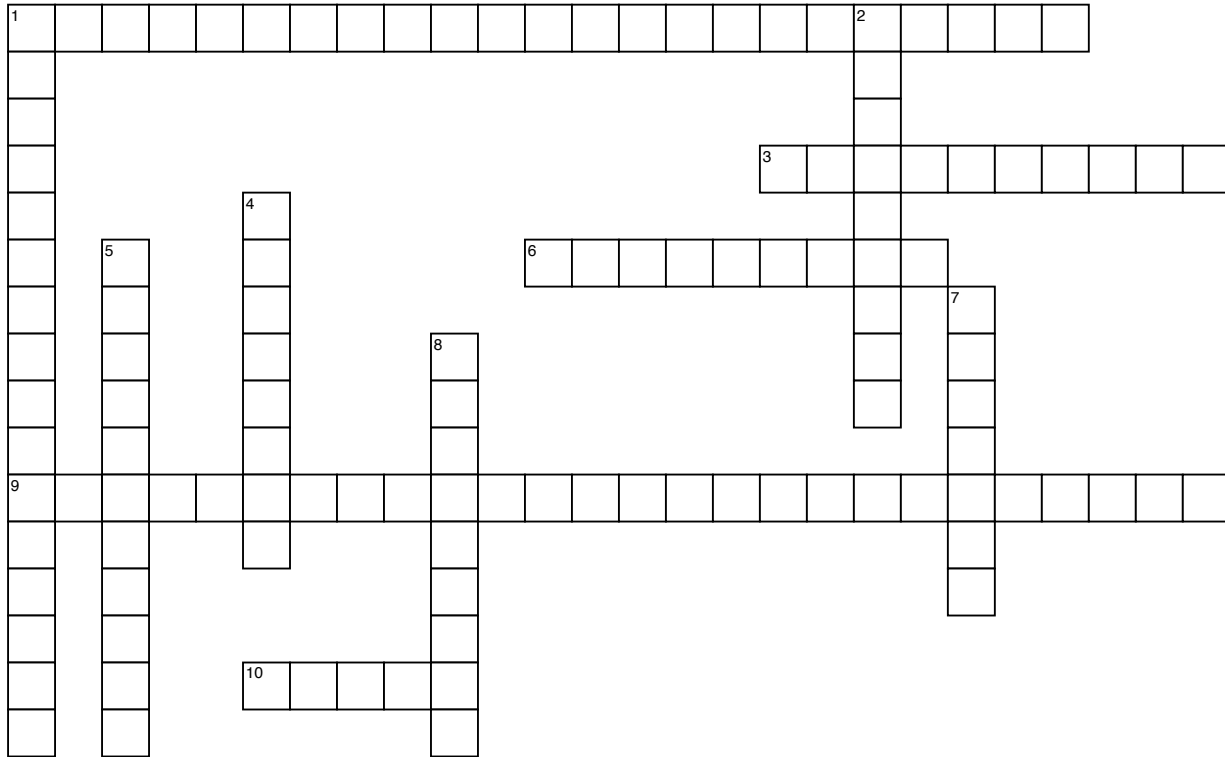

<http://jameshalderman.com>

ACROSS

- 1 A _____ is a FWD unit that has been disassembled, cleaned, inspected, and reassembled using new or like-new parts.
- 3 Before removing the transmission/transaxle for replacement or repair, be sure that the unit is properly _____.
- 6 Major transmission components such as pumps, clutch drums, or gear sets are called _____.
- 9 A _____ is a RWD unit that has been disassembled, cleaned, inspected, and reassembled using new or like-new parts.
- 10 It is not unusual for a transmission or transaxle to be removed from the vehicle when the _____ could have been repaired with the unit still in the vehicle.

DOWN

- 1 There is a possibility that the converter can slide off its splines and fall as the transmission is being removed, therefore some manufacturers recommend installing a converter _____.
- 2 _____ washers or snap rings are produced in various sizes.
- 4 A complete _____ includes disassembling the entire disassembly and replacing all needed parts and gaskets and seals to restore the transmission to perform like a new unit.
- 5 A supplier other than the vehicle manufacturer.
- 7 Some states have rules and regulations that define what an automatic transmission _____ or overhaul must include.
- 8 _____ are those parts that are normally replaced during an overhaul.