


# Transmission/Transaxle Removal and Disassembly

## Chapter 15

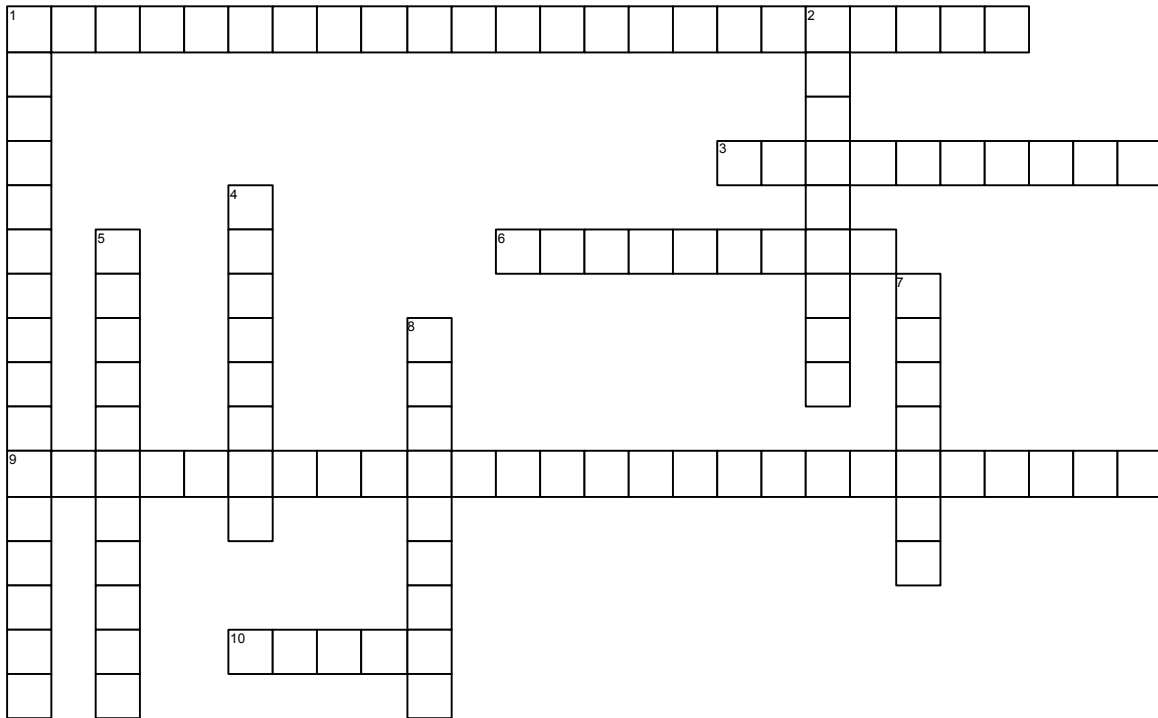

<http://jameshaldeman.com>

### ACROSS

- 1 A \_\_\_\_\_ is a FWD unit that has been disassembled, cleaned, inspected, and reassembled using new or like-new parts.
- 3 Before removing the transmission/transaxle for replacement or repair, be sure that the unit is properly \_\_\_\_\_.
- 6 Major transmission components such as pumps, clutch drums, or gear sets are called \_\_\_\_\_.
- 9 A \_\_\_\_\_ is a RWD unit that has been disassembled, cleaned, inspected, and reassembled using new or like-new parts.
- 10 It is not unusual for a transmission or transaxle to be removed from the vehicle when the \_\_\_\_\_ could have been repaired with the unit still in the vehicle.

### DOWN

- 1 There is a possibility that the converter can slide off its splines and fall as the transmission is being removed, therefore some manufacturers recommend installing a converter \_\_\_\_\_.
- 2 \_\_\_\_\_ washers or snap rings are produced in various sizes.
- 4 A complete \_\_\_\_\_ includes disassembling the entire disassembly and replacing all needed parts and gaskets and seals to restore the transmission to perform like a new unit.
- 5 A supplier other than the vehicle manufacturer.
- 7 Some states have rules and regulations that define what an automatic transmission \_\_\_\_\_ or overhaul must include.
- 8 \_\_\_\_\_ are those parts that are normally replaced during an overhaul.