


Transmission/Transaxle Assembly and Installation

Chapter 17

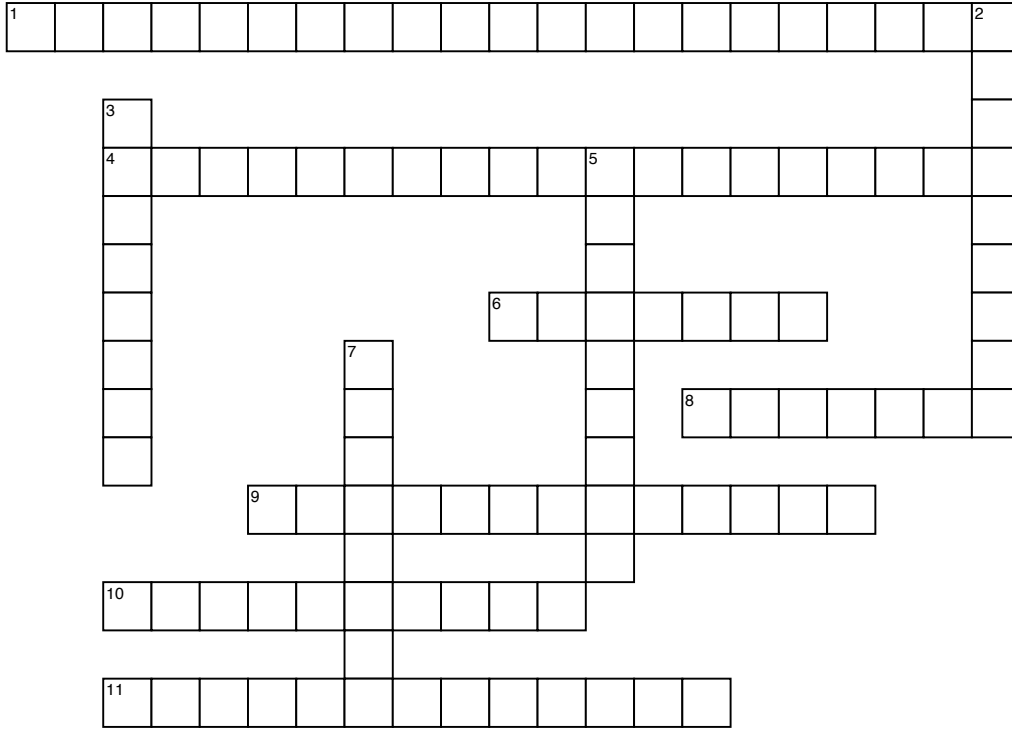

<http://jameshalderman.com>

ACROSS

- 1 Because of environmental concerns, most chemical cleaning is now performed using _____-_____.
- 4 _____ is normally measured using a feeler gauge placed between the pressure plate and the snap ring.
- 6 A _____ is a metal sleeve that is lined with a soft bearing material, usually bronze, tin, or both.
- 8 Case _____ is checked by placing a precision straightedge over the area to be checked and trying to slide a feeler gauge between the case and the straightedge.
- 9 _____ are used to separate rotating parts from each other or from stationary parts.
- 10 When end-play positioning is critical or thrust loads are very high, a radial needle bearing commonly called a _____ is used.
- 11 _____ include clutch packs, the pump, and the valve body.

DOWN

- 2 Tapered roller bearings must be adjusted to get the correct end play or preload, normally accomplished by changing _____-sized shims that can be positioned under the cup.
- 3 _____, Teflon sealing rings are installed by placing them in the groove with the ends lapped in the correct direction.
- 5 A _____ can cause an unwanted, partial application of a clutch or band that can lead to an early failure.
- 7 Bushings and _____ are used to support rotating shafts.