


Drum Brakes

Chapter 10

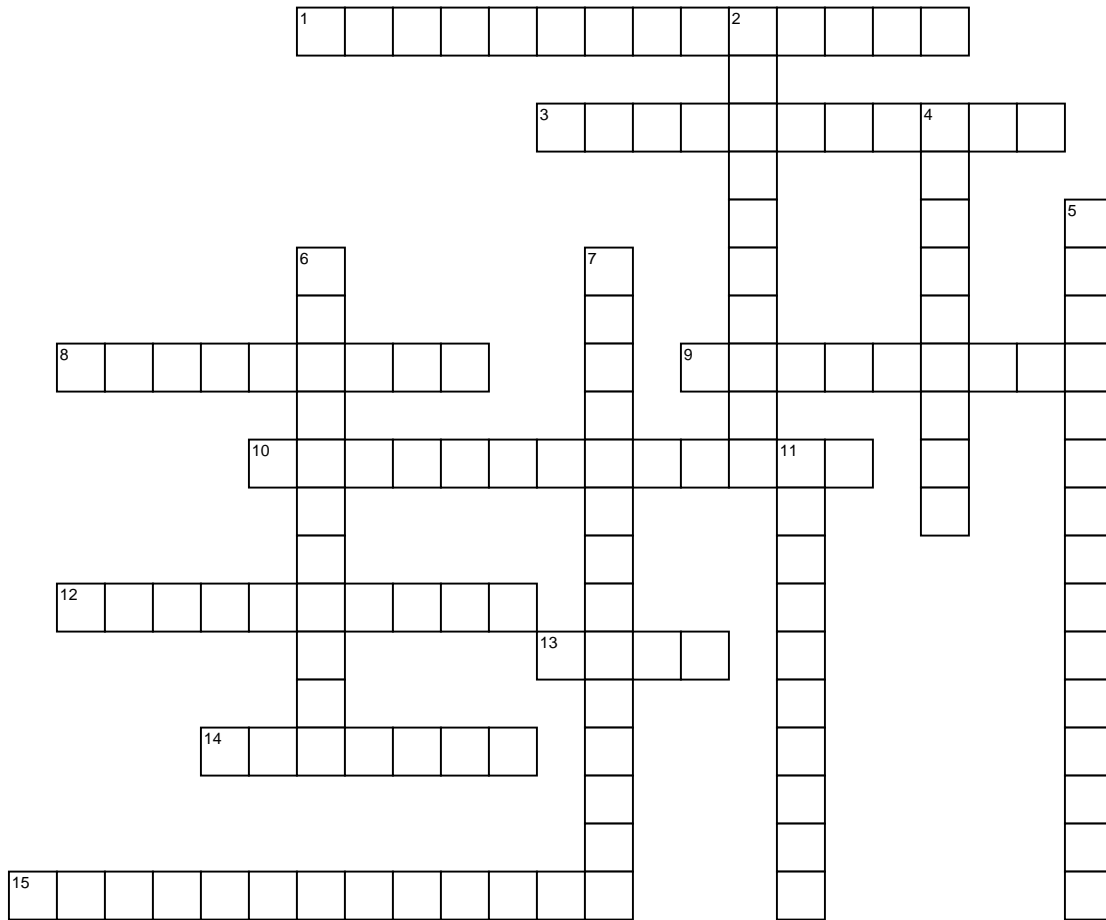

<http://jameshalderman.com>

ACROSS

- 1 _____ occurs when the brake drum gets so hot it expands away from the brake linings.
- 3 The curved metal piece on the outer portion of the shoe is called the _____.
- 8 The _____ contain three groups of letters and numbers.
- 9 _____ occurs when moisture is trapped between the shoes and drum, where it acts as a lubricant.
- 10 The lip fits into a machined groove in the open edge of the brake drum to provide an even better water barrier or seal, this type of seal is called a _____.
- 12 At the time of purchase, a _____ is added to the cost of the relined parts.
- 13 On some shoes, the edge of the lining table contains small V- or U-shaped notches called _____.
- 14 _____ occurs under extended hard braking from high speeds, a thin layer of hot gases and dust particles can build up between the brake shoe linings and drum.
- 15 _____ use high-temperature adhesive to glue the brake block directly to the shoe lining table or pad backing plate.

DOWN

- 2 _____ occurs when the friction coefficient of the brake lining material drops off sharply because intense heat makes it slippery.
- 4 _____ is the loss of stopping power that occurs when excessive heat reduces the friction between the brake shoe linings and the drum.
- 5 The _____ are stamped into the backing plate and contact the edges of the brake shoes to keep the linings properly aligned with the center of the friction surface inside the brake drum.
- 6 _____ prevent the brake shoes from rotating with the drum when the brakes are applied.
- 7 This play enables the assembly to absorb vibration, and the result is that _____ operate more quietly than bonded linings.
- 11 The upper ends of the webs on dual-servo brake shoes have semi-circular cutouts called _____.