


Drum Brakes

Chapter 58

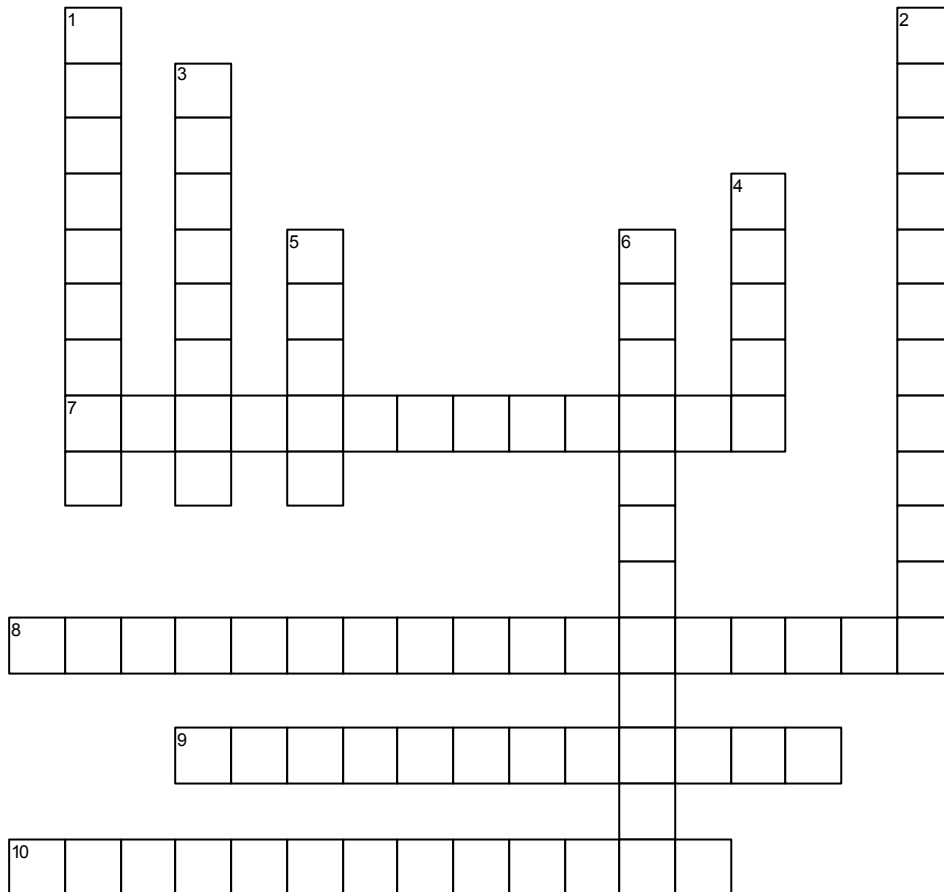

<http://jameshalderman.com>

ACROSS

- 7 New vehicles have _____ on the stud when the vehicle is being assembled.
- 8 For best results, many brake suppliers sell drum _____ to purchase when replacing brake shoes.
- 9 The _____ supports the parts of the drum brake and helps to keep water from getting onto the brake shoes.
- 10 After the _____ have been removed, the hold-down springs and other brake hardware can be removed.

DOWN

- 1 Another name for tinnerman nuts are _____.
- 2 Side-cut pliers can be used to cut the heads off of the _____ from the backing plate to release the drum from the shoes.
- 3 _____ or hubless drums are usually on the rear of a rear-wheel-drive vehicle.
- 4 Brake linings for drum brakes are known as _____.
- 5 A _____ or hub-mounted drum is often used on the rear of front-wheel-drive vehicles.
- 6 To prevent damage, remove the _____ from the backing plate or drum and back off the adjuster.