


# Disarm and Enable Airbags

**Meets NATEF Task:** (A6-H-6) Disarm and enable the airbag system for vehicle service.  
 (P-1)

Name \_\_\_\_\_ Date \_\_\_\_\_ Time on Task \_\_\_\_\_

Make/Model/Year \_\_\_\_\_ VIN \_\_\_\_\_ Evaluation: 4 3 2 1

Airbags should be temporarily disabled whenever working on or around the steering column or dash areas of a vehicle equipped with airbags.

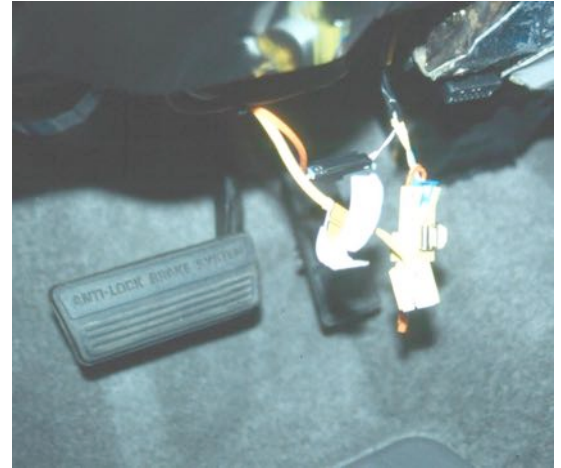

\_\_\_\_\_ 1. Check service information for the specified method to use to disarm and enable the airbags.

\_\_\_\_\_  
 \_\_\_\_\_  
 \_\_\_\_\_

\_\_\_\_\_ 2. Disconnect the negative (-) battery cable.

\_\_\_\_\_ 3. Locate and remove the airbag fuse.

Label of fuse = \_\_\_\_\_

Amperage rating of the fuse = \_\_\_\_\_

\_\_\_\_\_ 4. Remove the covering from underneath the steering column to gain access to the steering column airbag wiring connector.

\_\_\_\_\_ 5. Disconnect the yellow airbag electrical connector.

\_\_\_\_\_ 6. Locate and disconnect the yellow passenger side airbag electrical connector.

Describe the location \_\_\_\_\_

What components had to be removed to gain access to the passenger side airbag connector? \_\_\_\_\_

\_\_\_\_\_ 7. After servicing the steering column or dash, restore the airbags by reconnecting the connectors, installing the airbag circuit fuse, and reconnecting the battery.

\_\_\_\_\_ 8. Start the engine and check for proper operation of the airbag warning light.

**OK** \_\_\_\_\_ **NOT OK** \_\_\_\_\_