

Fuel Trim Diagnosis

Meets NATEF Task: (A8-B-3) Diagnose emissions or driveability concerns without stored diagnostic trouble codes; determine necessary action. (P-1)

Name _____ Date _____ Time on Task _____


Make/Model/Year _____ VIN _____ Evaluation: 4 3 2 1

Fuel trim is the computer correction factor that uses the oxygen sensor to determine if more or less fuel needs to be delivered by the fuel injectors. Fuel trim is only available on a scan tool.

- _____ 1. Connect a scan tool and select long-term fuel trim (LTFT) (block learn) and short-term fuel trim (STFT).

- _____ 2. Start the engine and operate until normal operating temperature and closed loop status is achieved.

- _____ 3. Record the following cell number and LTFT amount:

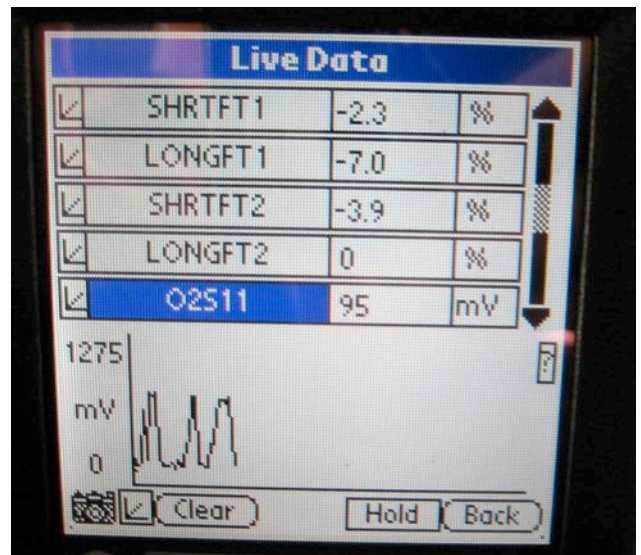

Cell	LTFT	STFT
Idle in Drive (if automatic transmission only)	_____	_____
Idle in Park A/C off	_____	_____
Idle in Park A/C on	_____	_____
3000 RPM in Park	_____	_____

Results: Fuel trim should be within plus or minus 10% or within 118-138 if the block/integration is displayed as a binary number.

- _____ 4. Based on the test results, what is the necessary action? _____
