

# Differential Assembly Inspection

**Meets NATEF Task:** (A3-E-5) Remove, inspect, and reinstall ring gear, drive pinion, and bearings. (P-2)

Name \_\_\_\_\_ Date \_\_\_\_\_ Time on Task \_\_\_\_\_


Make/Model/Year \_\_\_\_\_ VIN \_\_\_\_\_ Evaluation: 4 3 2 1

\_\_\_\_ 1. Check service information and determine the specified procedure to follow for the removal and reinstallation of the ring gear, drive pinion, and bearings. Describe the procedure.

\_\_\_\_\_

\_\_\_\_\_

\_\_\_\_\_

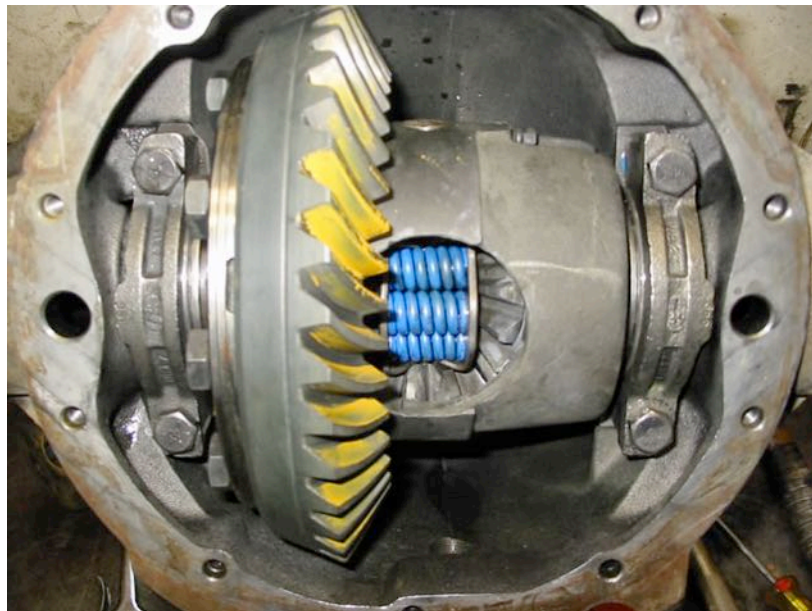

\_\_\_\_ 2. Check service information and determine the torque specifications for the following:

- Cover \_\_\_\_\_
- Ring gear bolts \_\_\_\_\_
- Side bearing caps \_\_\_\_\_
- Other (describe) \_\_\_\_\_