

# Tire Replacement

**Meets NATEF Task:** (A4-D-3, A4-D-4, A4-D-8) Dismount and remount tire on wheel; balance wheel tire and assembly. (P-1, P-2, P-2)

Name \_\_\_\_\_ Date \_\_\_\_\_ Time on Task \_\_\_\_\_

Make/Model/Year \_\_\_\_\_ VIN \_\_\_\_\_ Evaluation: 4 3 2 1


\_\_\_\_\_ 1. Check the instructions for the proper use of the tire changer. Describe the recommended procedure.

\_\_\_\_\_

\_\_\_\_\_

\_\_\_\_\_ 2. Check all steps that were performed.

\_\_\_\_\_ Removed the valve core (TPMS equipped tire/wheel assembly; check service information for the exact procedure to follow.)

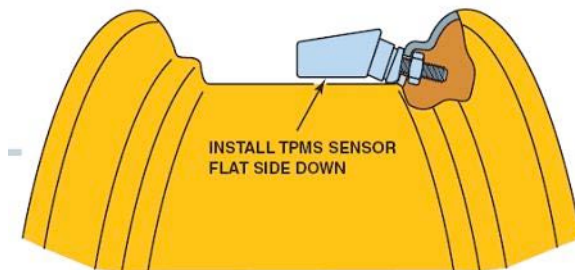

\_\_\_\_\_ Demount the tire from the wheel. **Instructor OK** \_\_\_\_\_

\_\_\_\_\_ Clean bead seat.

\_\_\_\_\_ Lubricate the tire bead.

\_\_\_\_\_ Mount the tire and inflate to specified inflation pressure.

\_\_\_\_\_ 3. Balance tire/wheel assembly.

**Instructor OK** \_\_\_\_\_

