

# Tire Rotation


**Meets NATEF Tasks:** (A4-F-3) Rotate tires according to manufacturer's recommendations. (P-1)

Name \_\_\_\_\_ Date \_\_\_\_\_ Time on Task \_\_\_\_\_

Make/Model/Year \_\_\_\_\_ VIN \_\_\_\_\_ Evaluation: 4 3 2 1

\_\_\_\_\_ 1. Check the service information for the recommended tire rotation method.

- \_\_\_\_\_ Cannot rotate tires on this vehicle
- \_\_\_\_\_ Modified X method
- \_\_\_\_\_ X method
- \_\_\_\_\_ Front to rear and rear to front

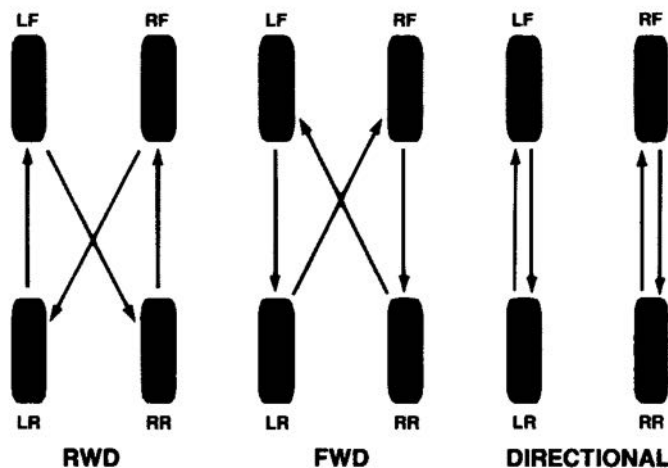

\_\_\_\_\_ 2. Hoist the vehicle safely to a good working position (chest level).

\_\_\_\_\_ 3. Remove the wheels and rotate them (if possible) according to the vehicle manufacturer's recommendation.

\_\_\_\_\_ 4. Check and correct the tire air pressures according to the service information on the placard on the driver's door.

Specified front tire air pressure = \_\_\_\_\_

Specified rear tire air pressure = \_\_\_\_\_

\_\_\_\_\_ 5. Lower the vehicle and move the hoist pads before driving the vehicle out of the service stall.