
## **Environmental And Hazardous Materials**

Chapter 2

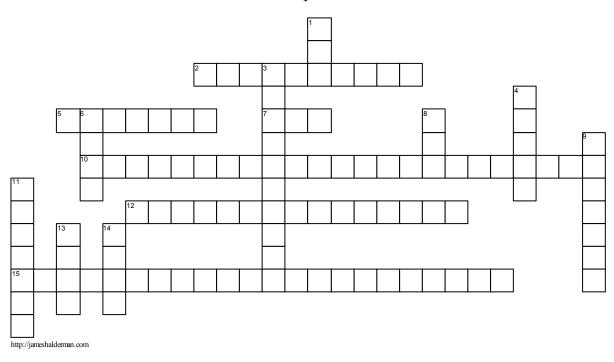

## **ACROSS**

2	Aspecial	system has been
	proven to be eff	ective in keeping asbestos
	exposure levels	below 0.1 fibers per cubic
	centimeter.	

- **5** A\_\_\_\_\_ is a liquid that is used to dissolve dirt, grime, or solid particles.
- 7 Lead-acid battery disposal is prohibited in landfills or incinerators is one of the battery laws of the \_\_\_\_.
- or components, that the shop no longer needs that pose a danger to the environment and people if they are disposed of in ordinary garbage cans or sewers.
- 12 The \_\_\_\_\_\_ state that employees have a right to know when the materials they use at work are hazardous.
- 15 Used oil must be stored in compliance with an existing \_\_\_\_\_ or aboveground storage tank standard, or kept in separate containers.

## **DOWN**

1	Air-conditioning systems and refrigerant are		
	regulated by the, Title VI, Section 609.		
3	Asbestos exposure can cause scar tissue to		
	form in the lungs, it is called .		
4	In Canada, MSDS information is called .		
	The US Congress passed the in 1970.		
	The publishes a list of hazardous		
	materials that is included in the Code of		
	Federal Regulations.		
9	is any petroleum-based or synthetic		
	oil that has been used.		
11	can be absorbed through the skin		
	and is a heavy metal that once absorbed by		
	the body does not leave.		
13	All hazardous materials must be properly		
	labeled, and information about each		
	hazardous material must be posted on		
	available from the manufacturer.		
14	The law states that hazardous materials		
	users are responsible for hazardous materials		

from the time they become a waste until the proper waste disposal is completed.