


## **HALDERMAN** Environmental And Hazardous Materials

Chapter 2

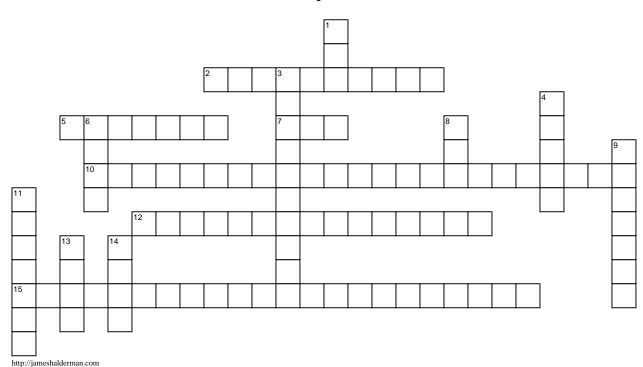

## ACROSS

- 2 A special \_\_\_\_\_ system has been proven to be effective in keeping asbestos exposure levels below 0.1 fibers per cubic centimeter.
- **5** A \_\_\_\_\_ is a liquid that is used to dissolve dirt, grime, or solid particles.
- 7 Lead-acid battery disposal is prohibited in landfills or incinerators is one of the battery laws of the .
- are chemicals, 10 or components, that the shop no longer needs that pose a danger to the environment and people if they are disposed of in ordinary garbage cans or sewers.
- 12 The \_\_\_\_\_- \_\_\_\_ state that employees have a right to know when the materials they use at work are hazardous.
- 15 Used oil must be stored in compliance with an existing or aboveground storage tank standard, or kept in separate containers.

## DOWN

- 1 Air-conditioning systems and refrigerant are regulated by the , Title VI, Section 609.
- 3 Asbestos exposure can cause scar tissue to form in the lungs, it is called .
- 4 In Canada, MSDS information is called \_\_\_\_\_
- 6 The US Congress passed the \_\_\_\_\_ in 1970.
- 8 The publishes a list of hazardous materials that is included in the Code of Federal Regulations.
- **9** \_\_\_\_\_ is any petroleum-based or synthetic oil that has been used.
- 11 can be absorbed through the skin and is a heavy metal that once absorbed by the body does not leave.
- **13** All hazardous materials must be properly labeled, and information about each hazardous material must be posted on \_\_\_\_\_ available from the manufacturer.
- 14 The law states that hazardous materials users are responsible for hazardous materials from the time they become a waste until the proper waste disposal is completed.