

# Tire Rotation


**Meets ASE Tasks:** (A4-F-3) P-1 Rotate tires according to manufacturer's recommendations.

Name \_\_\_\_\_ Date \_\_\_\_\_ Time on Task \_\_\_\_\_

Make/Model/Year \_\_\_\_\_ VIN \_\_\_\_\_ Evaluation: 4 3 2 1

\_\_\_\_\_ 1. Check the service information for the recommended tire rotation method.

- \_\_\_\_\_ Cannot rotate tires on this vehicle  
 \_\_\_\_\_ Modified X method  
 \_\_\_\_\_ X method  
 \_\_\_\_\_ Front to rear and rear to front

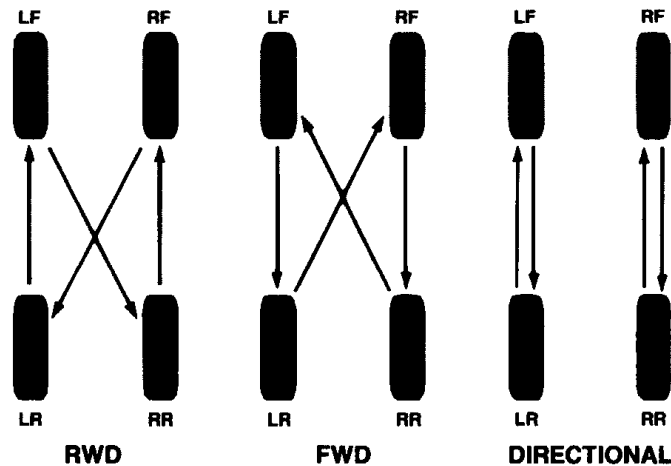

\_\_\_\_\_ 2. Hoist the vehicle safely to a good working position (chest level).

\_\_\_\_\_ 3. Remove the wheels and rotate them (if possible) according to the vehicle manufacturer's recommendation.

\_\_\_\_\_ 4. Check and correct the tire air pressures according to the service information on the placard on the driver's door.

Specified front tire air pressure = \_\_\_\_\_

Specified rear tire air pressure = \_\_\_\_\_

\_\_\_\_\_ 5. Tighten the lug nuts to factory specifications. What is the factory specification?

\_\_\_\_\_

\_\_\_\_\_ 6. Lower the vehicle and move the hoist pads before driving the vehicle out of the service stall.