

# Injector Voltage Waveform Test

**Meets ASE Task:** (A8-D-7) P-2 Inspect and test fuel injectors.

Name \_\_\_\_\_ Date \_\_\_\_\_ Time on Task \_\_\_\_\_

Make/Model/Year \_\_\_\_\_ VIN \_\_\_\_\_ Evaluation: 4 3 2 1


\_\_\_\_\_ 1. Check service information for the type of fuel injector being used.

\_\_\_\_\_ Saturated

\_\_\_\_\_ Peak and hold

\_\_\_\_\_ 2. Connect a digital storage oscilloscope (DSO) or graphing multimeter (GMM) to the pulsed side of the injector. (Check service information for the color of wire used for the pulse.)

\_\_\_\_\_ 3. Start the engine and observe the voltage waveform.

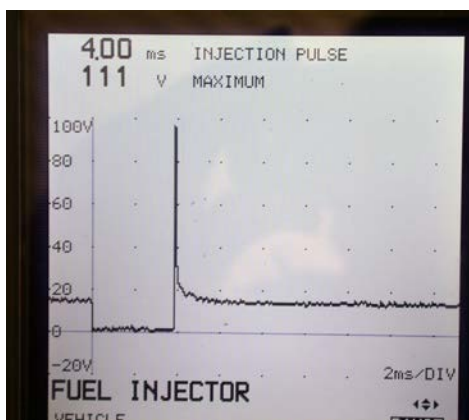

\_\_\_\_\_ 4. Does the voltage spike (kick) exceed 30 volts? \_\_\_\_\_ Yes \_\_\_\_\_ No

\_\_\_\_\_ 5. What is the injector pulse-width? \_\_\_\_\_ (normally between 1.5 and 3.5 ms at idle on a warm engine)

\_\_\_\_\_ 6. Based on the test performed, what is the necessary action? \_\_\_\_\_

\_\_\_\_\_

\_\_\_\_\_