

Name _____

MULTIPLE CHOICE. Choose the one alternative that best completes the statement or answers the question.

- 1) During a transmission rebuild, it is good practice to replace _____. 1) _____
 - A) Rubber sealing rings
 - B) Lined clutch plates
 - C) Paper and composition gaskets
 - D) All of these

- 2) What is the preferred tool to use when removing a pump? 2) _____
 - A) A chain
 - B) Slide hammers
 - C) Special screw-type puller
 - D) Either B or C

- 3) Technician A says that the torque converter should be removed with the transmission. Technician B says that it is easier to leave the torque converter attached to the engine. Which technician is correct? 3) _____
 - A) Technician A only
 - B) Technician B only
 - C) Both technicians
 - D) Neither technician

- 4) What can be used to prevent the converter from sliding off its splines and falling as the transmission is being removed? 4) _____
 - A) Keep the torque converter attached to the flexplate
 - B) Pack assembly lube into the splines
 - C) Use a retaining bracket
 - D) Tilt the transmission up at the rear


- 5) Transmission end play is adjusted using _____. 5) _____
 - A) Selective washers
 - B) Paper shims
 - C) Different sized case O-rings
 - D) The end play adjusting bolt

- 6) It is standard practice to _____ before removing the pump assembly. 6) _____
 - A) Remove the extension housing
 - B) Remove the direct (forward) clutch assembly
 - C) Check end play
 - D) Loosen the band adjustment

- 7) What component or part cannot be replaced with the transmission/transaxle in the vehicle? 7) _____
 - A) Torque converter
 - B) Shift solenoids
 - C) Valve body
 - D) Output speed sensor

8) What is the purpose of this tool (arrow)?

8) _____

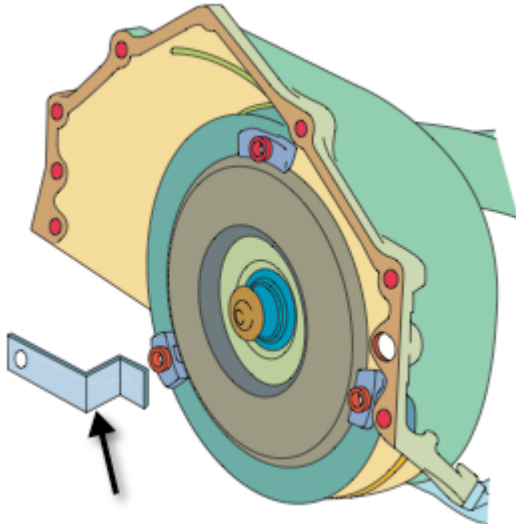

- A) Flywheel turner
- B) Torque strap
- C) Torque converter retainer
- D) Depth gauge

9) On a transaxle, what component may be located behind the valve body?

9) _____

- A) The input shaft
- B) The torque converter
- C) The input drive chain
- D) The front seal

10) Some states have rules and regulations that define what an automatic transmission rebuild or overhaul must include when performing what service or repair?

10) _____

- A) Fluid exchange service
- B) Filter replacement
- C) Overhaul
- D) Extension housing seal replacement

Answer Key

Testname: ATT7_15A

1) D

Page Ref: 223

2) D

Page Ref: 226

3) A

Page Ref: 222

4) C

Page Ref: 222

5) A

Page Ref: 226

6) C

Page Ref: 225

7) A

Page Ref: 221

8) C

Page Ref: 222

9) C

Page Ref: 226

10) C

Page Ref: 220