

Name _____


MULTIPLE CHOICE. Choose the one alternative that best completes the statement or answers the question.

- 1) On a transaxle, what component may be located behind the valve body? 1) _____
- A) The input shaft
 - B) The torque converter
 - C) The input drive chain
 - D) The front seal

- 2) After the automatic transmission/transaxle has been removed from the vehicle, many service technicians use _____ to clean the road grime and dirt from the unit before starting disassembly. 2) _____
- A) A power washer
 - B) Hot soapy water and a steel wire brush
 - C) An acid bath
 - D) A scraper and a used tooth brush

- 3) What precautions should be observed when removing the valve body? 3) _____
- A) Wash it with solvent before removing
 - B) Note the position of the bolts
 - C) Use the proper valve body puller
 - D) Make sure to remove the valve body before removing the filter

- 4) What is the purpose of this tool (arrow)? 4) _____

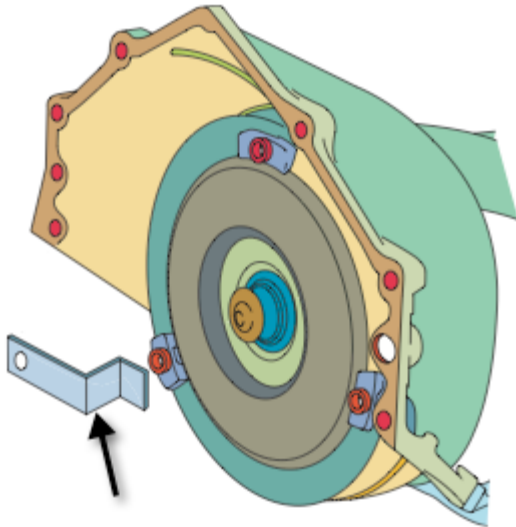

- A) Flywheel turner
- B) Torque strap
- C) Torque converter retainer
- D) Depth gauge

- 5) The transaxle drive chain can be re-installed in any orientation. 5) _____
- A) True
 - B) False

- 6) When replacing a transaxle, correct unit identification is critical because the _____ may be different, depending on the application or engine size of the vehicle. 6) _____
- A) Case material
 - B) Final drive ratio
 - C) Fluid color
 - D) Rubber seal material
- 7) During a transmission rebuild, it is good practice to replace _____. 7) _____
- A) Rubber sealing rings
 - B) Lined clutch plates
 - C) Paper and composition gaskets
 - D) All of these
- 8) What is the first step usually specified by the vehicle manufacturers when removing an automatic transmission (rear-wheel-drive) from the vehicle? 8) _____
- A) Remove the driveshaft
 - B) Remove the torque converter
 - C) Disconnect the negative battery cable
 - D) Hoist the vehicle
- 9) What parts can usually be removed with the automatic transmission/transaxle still in the vehicle? 9) _____
- A) Pressure switches
 - B) Transmission range switch
 - C) Turbine and output speed sensors
 - D) Any of the above
- 10) Some states have rules and regulations that define what an automatic transmission rebuild or overhaul must include when performing what service or repair? 10) _____
- A) Fluid exchange service
 - B) Filter replacement
 - C) Overhaul
 - D) Extension housing seal replacement

Answer Key

Testname: ATT7_15B

1) C

Page Ref: 226

2) A

Page Ref: 223

3) B

Page Ref: 224

4) C

Page Ref: 222

5) B

Page Ref: 226

6) B

Page Ref: 221

7) D

Page Ref: 223

8) C

Page Ref: 221

9) D

Page Ref: 220-221

10) C

Page Ref: 220