


Name _____

MULTIPLE CHOICE. Choose the one alternative that best completes the statement or answers the question.

- 1) Incorrect or unequal U-joint working angles are most likely to be caused by _____. 1) _____
- A) a bent drive shaft
 - B) a collapsed engine or transmission mount
 - C) a dry output shaft spline
 - D) defective or damaged U-joints

- 2) What is the purpose of the wedge shown in this drawing? 2) _____

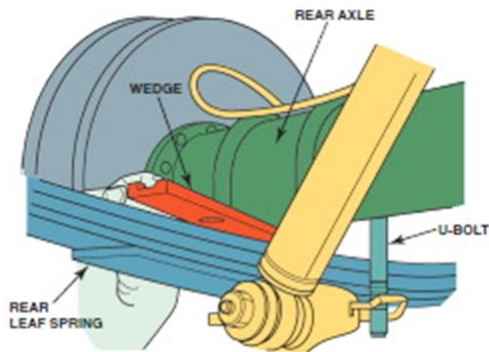

- A) To correct the driveshaft angle
 - B) To lower vehicle ride height
 - C) To raise vehicle ride height
 - D) To increase spring capacity
- 3) Technician A says that a proper U-joint inspection can be done with the driveshaft in place on the vehicle. Technician B says that you must remove the driveshaft to properly inspect the U-joints. Which technician is correct? 3) _____
- A) Technician A only
 - B) Technician B only
 - C) Both technicians A and B
 - D) Neither technician A nor B

- 4) A defective outer CV joint will usually make a _____. 4) _____
- A) rumbling noise
 - B) growling noise
 - C) clicking noise
 - D) clunking noise

- 5) A Cardan-type U-joint may require what tool(s) to replace? 5) _____
- A) A special tool
 - B) A torch
 - C) A press or a vice
 - D) May require any of the above

- 6) Two technicians are discussing FWD driveshaft service. Technician A says that removal of the driveshaft usually requires partial disassembly of the front suspension. Technician B says that the first step in driveshaft removal is to loosen the front hub nut. Which technician is correct? 6) _____
- A) Technician A only
 - B) Technician B only
 - C) Both technicians A and B
 - D) Neither technician A nor B
- 7) A defective (collapsed) engine mount on a front-wheel drive vehicle can cause a vibration. 7) _____
- A) True
 - B) False
- 8) When servicing a drive shaft, technician A says that its a good idea to tape the U-joint caps to prevent them from coming off. Technician B says that needle bearings are used with this type of U-joints. Which technician is correct? 8) _____
- A) Technician A only
 - B) Technician B only
 - C) Both technicians A and B
 - D) Neither technician A nor B
- 9) When replacing U-joints, a special tool must be used to press onto both sides of the joint to sheer the plastic retainer. 9) _____
- A) True
 - B) False
- 10) Which tool is used to measure U-joint working angles? 10) _____
- A) Micrometer
 - B) Dial indicator
 - C) Vernier caliper
 - D) None of these are correct

Answer Key

Testname: CHASSIS8_34A

1) B

Page Ref: 567

2) A

Page Ref: 567

3) B

Page Ref: 563

4) C

Page Ref: 567

5) D

Page Ref: 565

6) C

Page Ref: 568-569

7) A

Page Ref: 572

8) C

Page Ref: 565

9) A

Page Ref: 565

10) D

Page Ref: 567