

Name _____

MULTIPLE CHOICE. Choose the one alternative that best completes the statement or answers the question.

- 1) A Cardan-type U-joint may require what tool(s) to replace? 1) _____
 - A) A special tool
 - B) A torch
 - C) A press or a vice
 - D) May require any of the above

- 2) Technician A says that a proper U-joint inspection can be done with the driveshaft in place on the vehicle. Technician B says that you must remove the driveshaft to properly inspect the U-joints. Which technician is correct? 2) _____
 - A) Technician A only
 - B) Technician B only
 - C) Both technicians A and B
 - D) Neither technician A nor B


- 3) The typical RWD drive shaft rotates about _____ times faster than the wheels? 3) _____
 - A) three
 - B) two
 - C) five
 - D) seven

- 4) Technician A hammers on a tie rod stud to break the taper with the steering knuckle. Technician B uses a special puller to separate the tie rod stud from the steering knuckle. Which technician is correct? 4) _____
 - A) Technician A only
 - B) Technician B only
 - C) Both technicians A and B
 - D) Neither technician A nor B


- 5) What is recommended to install the drive axle shaft to avoid damage to the hub bearing? 5) _____
 - A) Torque wrench
 - B) Cordless impact wrench
 - C) Pickle fork
 - D) Hub bearing puller

6) Which of these methods is the preferred way to disconnect a tie rod end?

6) _____

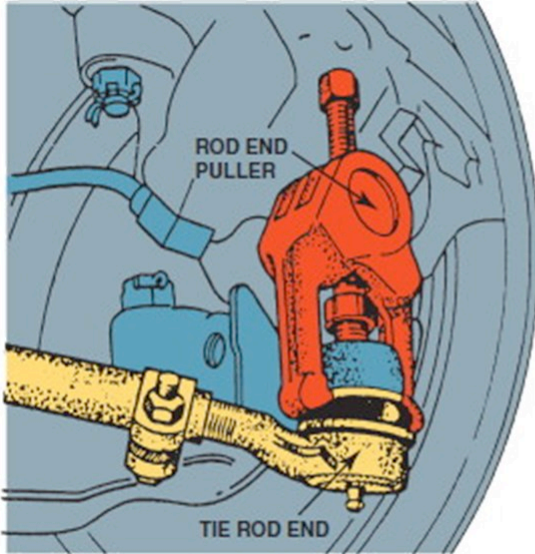

METHOD A

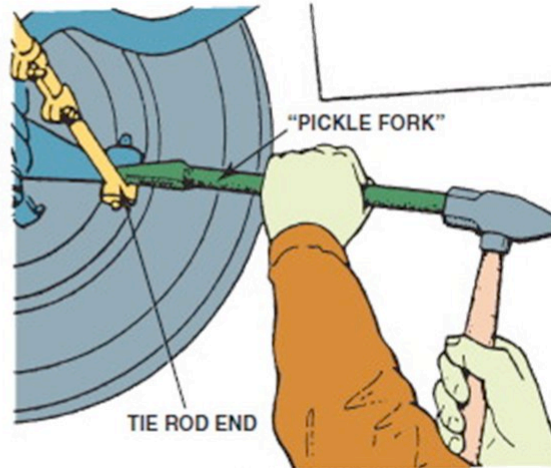

METHOD B

- A) Method A
- B) Method B
- C) Either A or B
- D) Neither A nor B

7) The splines of the drive shaft yoke should be lubricated to prevent _____.

7) _____

- A) a vibration
- B) spline bind
- C) rust
- D) transmission fluid leaking from the extension housing

8) FWD driveshaft problems are usually indicated by _____.

8) _____

- A) noise while turning
- B) loud clunk
- C) Both A and B
- D) Neither A nor B

9) The last step after installing a replacement CV boot is to _____.

9) _____

- A) "Burp" the boot
- B) lubricate the CV joint with chassis grease
- C) mark the location of the boot on the drive axle shaft
- D) separate the CV joint before installation

10) What needs to be removed to replace a drive axle shaft from a front wheel drive vehicle?

10) _____

- A) Tie rod end
- B) Lower control arm or ball joint
- C) Hub nut
- D) All of the above

Answer Key

Testname: CHASSIS8_34B

1) D

Page Ref: 565

2) B

Page Ref: 563

3) A

Page Ref: 562

4) B

Page Ref: 569

5) A

Page Ref: 569

6) A

Page Ref: 569

7) B

Page Ref: 570

8) C

Page Ref: 568

9) A

Page Ref: 569

10) D

Page Ref: 568-569