


Wheel Bearings And Service

Chapter 11

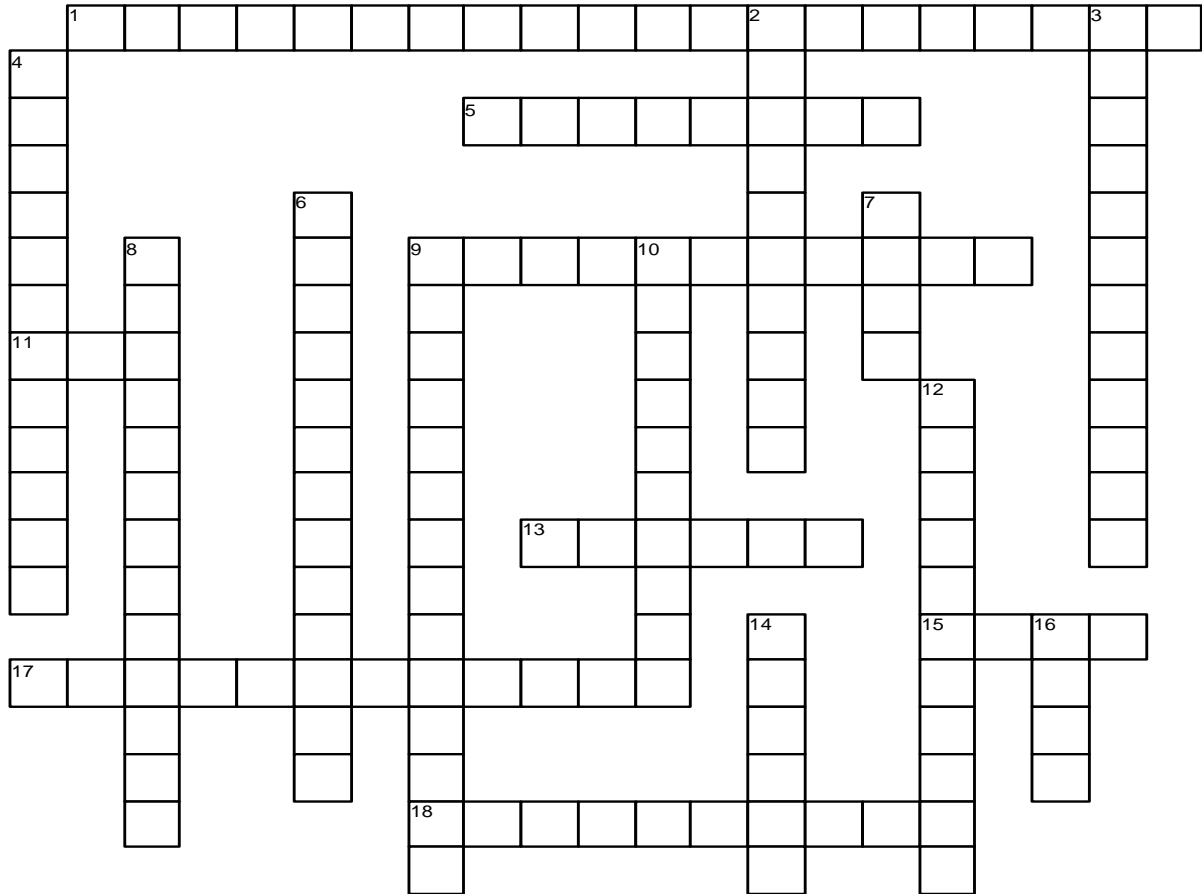

<http://jameshalderman.com>

ACROSS

- 1 _____ use rolling parts inside the bearing to reduce friction.
- 5 _____ is the process of metal between the cracks breaking into small chips, slabs, or scales of metal.
- 9 By design a tapered roller bearing can withstand _____.
- 11 Another name for the outer race is the _____.
- 13 Vehicles that use _____ (clips) use a straight roller bearing supporting a semi-floating axle shaft inside the axle housing.
- 15 Another name for the inner race is the _____.
- 17 _____ use hardened steel balls between the inner and outer race to reduce friction.
- 18 Install a new _____ flush with the hub using a seal driver.

DOWN

- 2 If a bump is hit while driving with a heavy load, the balls of a ball bearing or the rollers of a

roller bearing can make an indent in the race of the bearing, this dent is called _____.

- 3 The lip is often held in contact with the moving part with the aid of a _____.
- 4 _____ are used to seal between two surfaces that move.
- 6 A needle bearing is a type of roller bearing that uses smaller rollers called _____.
- 7 The rollers are held in place by a _____ between the inner race and the outer race.
- 8 The most commonly used automotive wheel bearing is the _____ bearings.
- 9 _____ use rollers between the inner and outer race to reduce friction.
- 10 Tapered roller bearings can withstand _____ in one direction.
- 12 _____ are used between two surfaces that do not move.
- 14 _____ is oil with a thickening agent to allow it to be installed in places where a liquid lubricant would not stay.
- 16 The _____ uses the penetration test as a guide to assign the grease a number.