


Preventative Maintenance And Service Procedures

Chapter 14

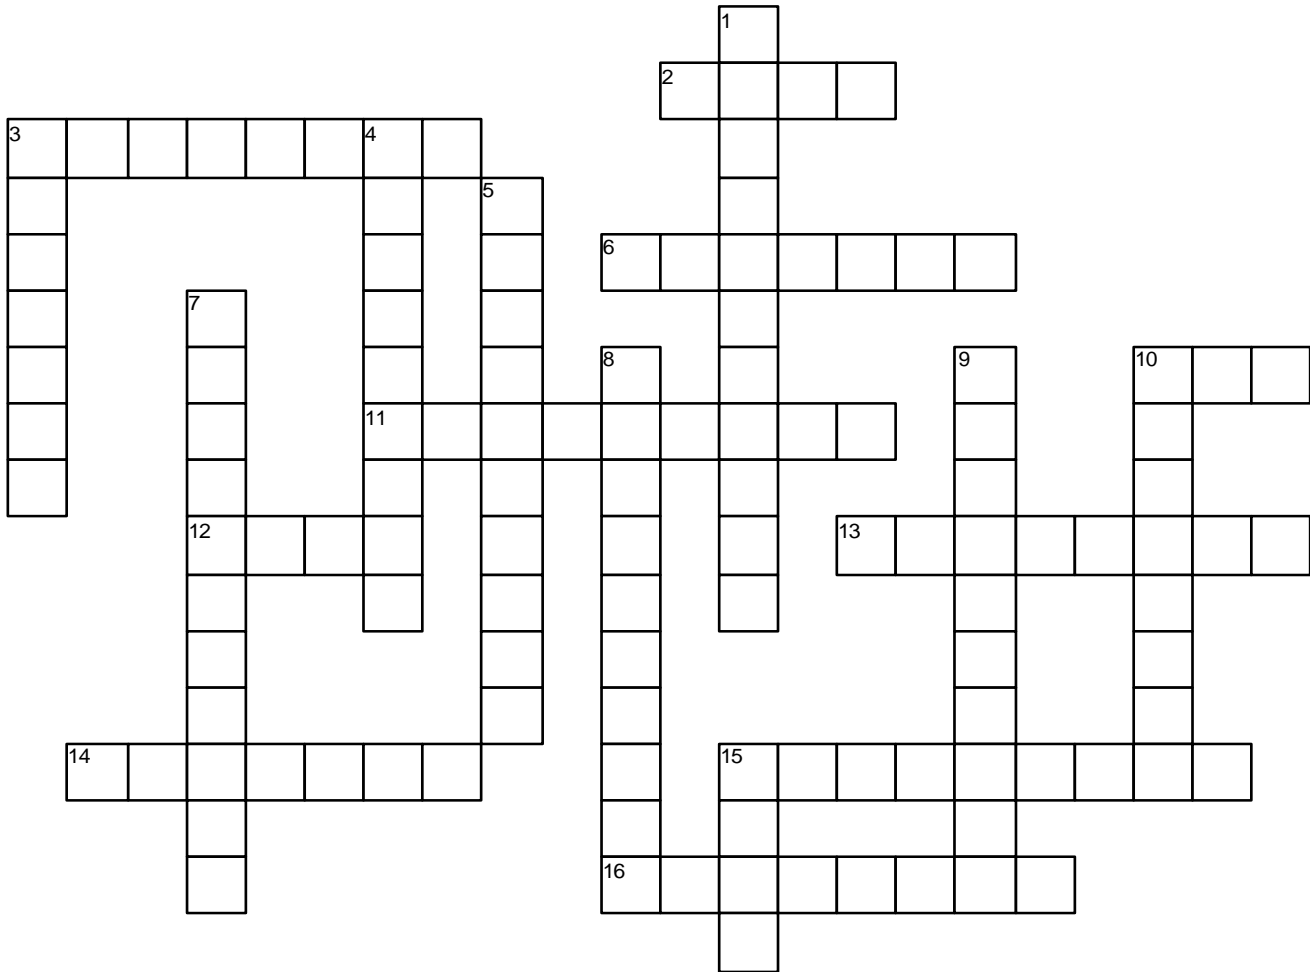

<http://jameshalderman.com>

ACROSS

- 2 Grease fittings are also called ____ fittings.
- 3 Gear lubes are specified by the _____ petroleum institute.
- 6 The ____ brake fluid is made from polydimethylsiloxanes.
- 10 Abbreviation for synchromesh transmission fluid sometimes known as manual transmission fluid.
- 11 A computer program called an _____, or a series of mathematical calculations, is used to determine the life of the engine oil.
- 12 The ____ uses the penetration test as a guide to assign the grease a number.
- 13 The oil level indicator, commonly called a _____, is clearly marked and in a convenient location.
- 14 The ____ brake fluid is formulated for use by all vehicles, import and domestic.
- 15 An ____ filters dirt from the air before it enters the intake system of the engine.
- 16 The ____ brake fluid is most often used.

DOWN

- 1 The ASTM specifies the consistency of grease using a _____ test.
- 3 Another name for grease fittings are _____ fittings.
- 4 The _____ transmission fluid is another important fluid that should be checked regularly.
- 5 _____ is short for polyalkylene-glycol-ether mixture.
- 7 A _____ is used in the heating, ventilation, and air-conditioning system to filter the outside air drawn into the passenger compartment.
- 8 _____ is used to transmit the force of the driver's foot on the brake pedal, called the service brake, to each individual wheel brake.
- 9 It is generally recommended that all belts, including the _____ belts be replaced every four to seven years.
- 10 The DOT 5 type is commonly called _____ Brake fluid.
- 15 ____ specifies the consistency of grease using a penetration test.