


In-Vehicle Engine Service

Chapter 24

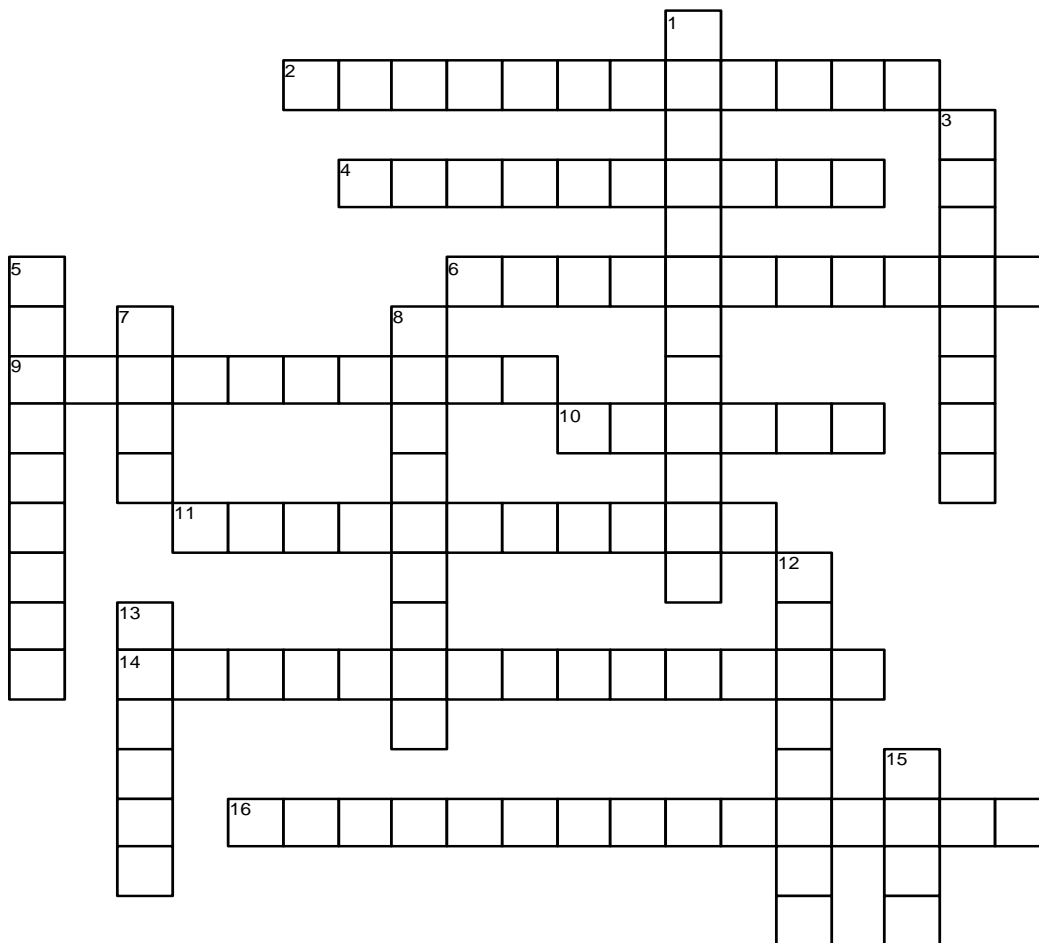

<http://jameshalderman.com>

ACROSS

- 2 _____ are made from rubber attached to a steel backing on both sides. One side is attached to the engine and the other to the body or frame.
- 4 Use propane to check if the engine changes when dispensed around the intake manifold gasket, if the engine changes in speed or sound there is a _____.
- 6 _____ have a limited service and a specified replacement interval ranging from 60,000 miles to about 100,000 miles.
- 9 All _____ valves move during operation to maintain the desired coolant temperature.
- 10 A _____ thermostat works, but not within the correct temperature range.
- 11 A _____ thermostat will likely cause the engine to overheat.
- 14 Because _____ gaskets are used to seal oil, air, and coolant in most causes, determining that the intake manifold gasket is the root cause can be a challenge.
- 16 Stuck partially open is one of the _____ for a thermostat.

DOWN

- 1 Dropping _____ is one sign of a leaking intake manifold gasket.
- 3 Expansion/contraction rate difference between the cast-iron head and the aluminum intake manifold can cause the intake manifold gasket to be damaged by the relative motion of the head and intake manifold, this type of failure is called _____.
- 5 A _____ replacement is needed if the bearing is noisy or loose.
- 7 Gasoline engines used in _____s can be a hazard to be around under some condition.
- 8 A _____ thermostat can cause the operating temperature of the engine to be less than normal.
- 12 Hybrid vehicles are designed to stop the gasoline engine unless needed, this feature is called _____.
- 13 Use a _____ inspection to check for evidence of oil or coolant between the intake manifold and the cylinder heads to indicate a leaking intake manifold.
- 15 The abbreviation for extended range electric vehicle is _____.